



Health & Safety **Legislation Explained**


The following 3 diagrams below show simplified versions of the legislative rules and how you can comply with them to ensure Health & Safety standards are met.

The Red bands represent the position & Height the manifestation must lie between.


General regulations for floor to ceiling glazing outline that frosted or vinyl manifestation markings at a minimum height of 50mm will suffice. However there are some variations to these regulations, where a darker colour vinyl is required in order to aid the visually impaired.

In order to satisfy Health & Safety standards, the design must:

- run the full length of the glazing
- be a minimum height of 50mm and
- positioned as shown.

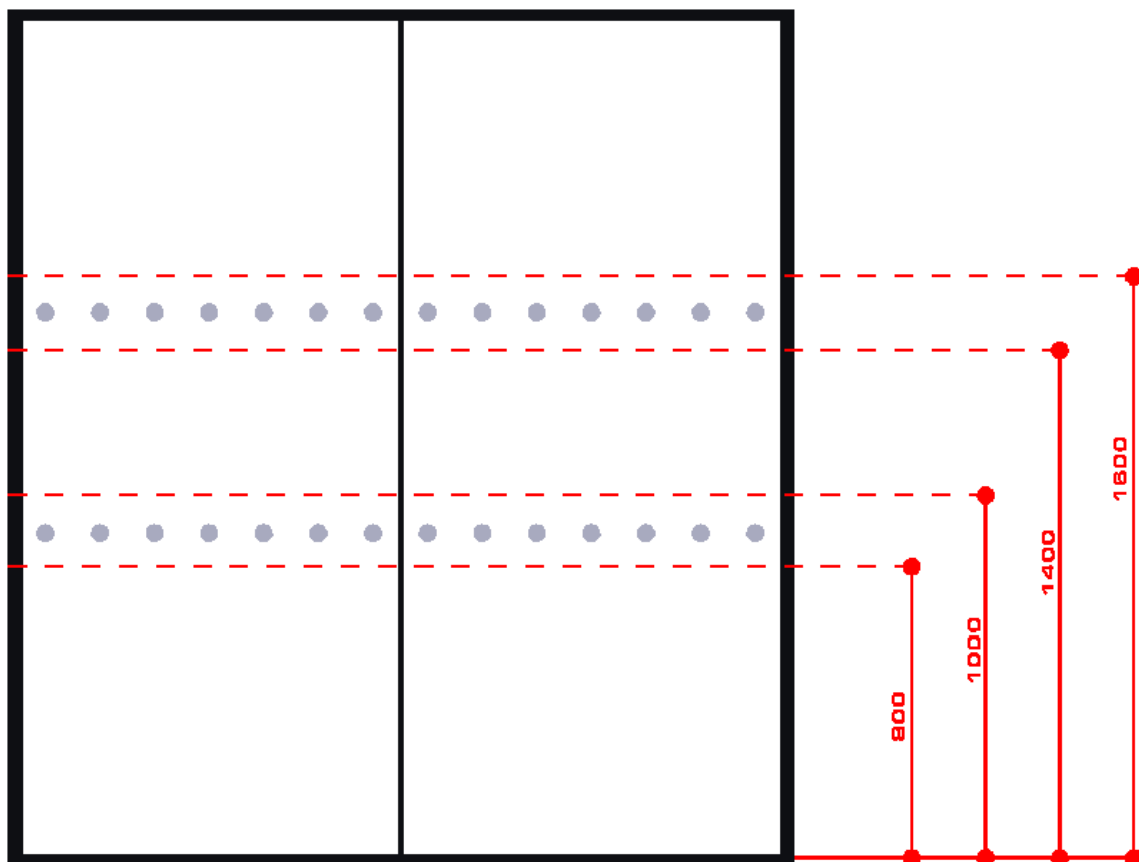

You can also opt for a custom manifestation design, logo or lettering as shown.

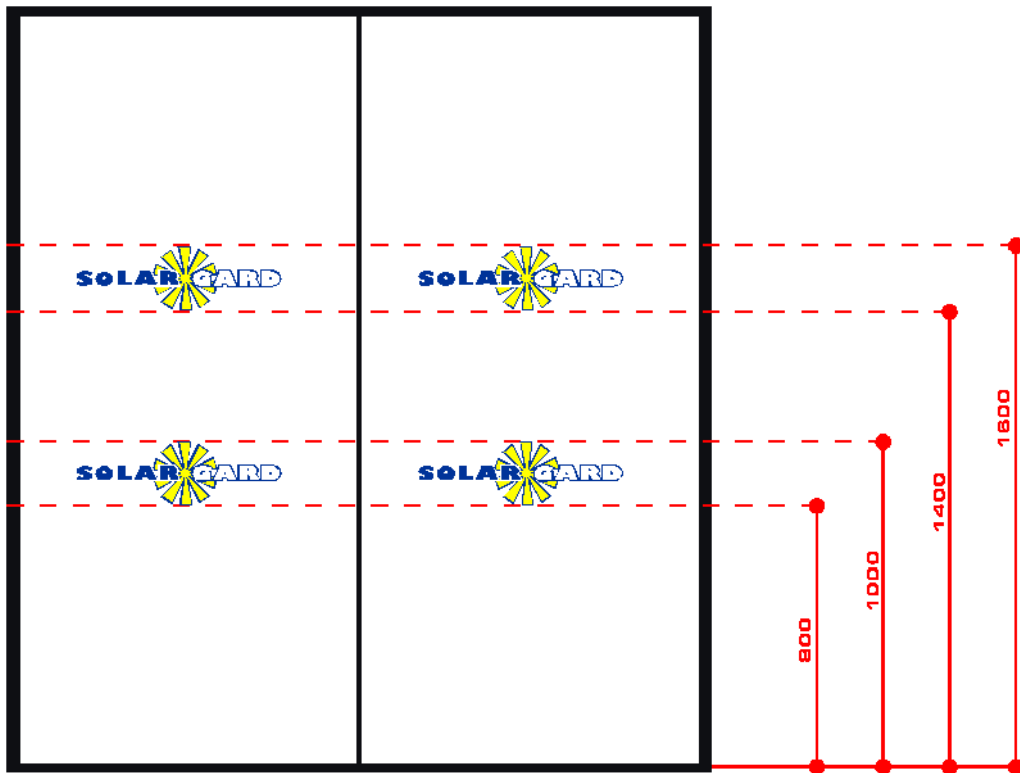

Larger custom designs can also be used and are only needed at one level, providing it crosses into both bands.

